



■ **CELL SPECIFICATIONS**


Shape / Can material		Cylindrical / Steel
Typical Capacity		2800mAh
Minimum Capacity		2700mAh
Nominal Voltage		3.7V
Charge Voltage		4.2V ± 0.05V
Charge Current		Less than 2.8A
Charge Time		3.0 hrs
Discharging current (Max.)		5.0 A (≤ 45 °C)
		4.0 A (≤ 60 °C)
Discharge Cutoff Voltage		3.0V
Temperature	Charge	0°C to 45°C
	Discharge	-30°C to 60°C
	Storage	<35°C
Weight (Max.)		50g
Dimensions	Diameter (D)	18.6mm (Max)
	Height (H)	65.2mm (Max)
Energy	Volumetric	609 Wh/l
Density	Gravimetric	216 Wh/kg

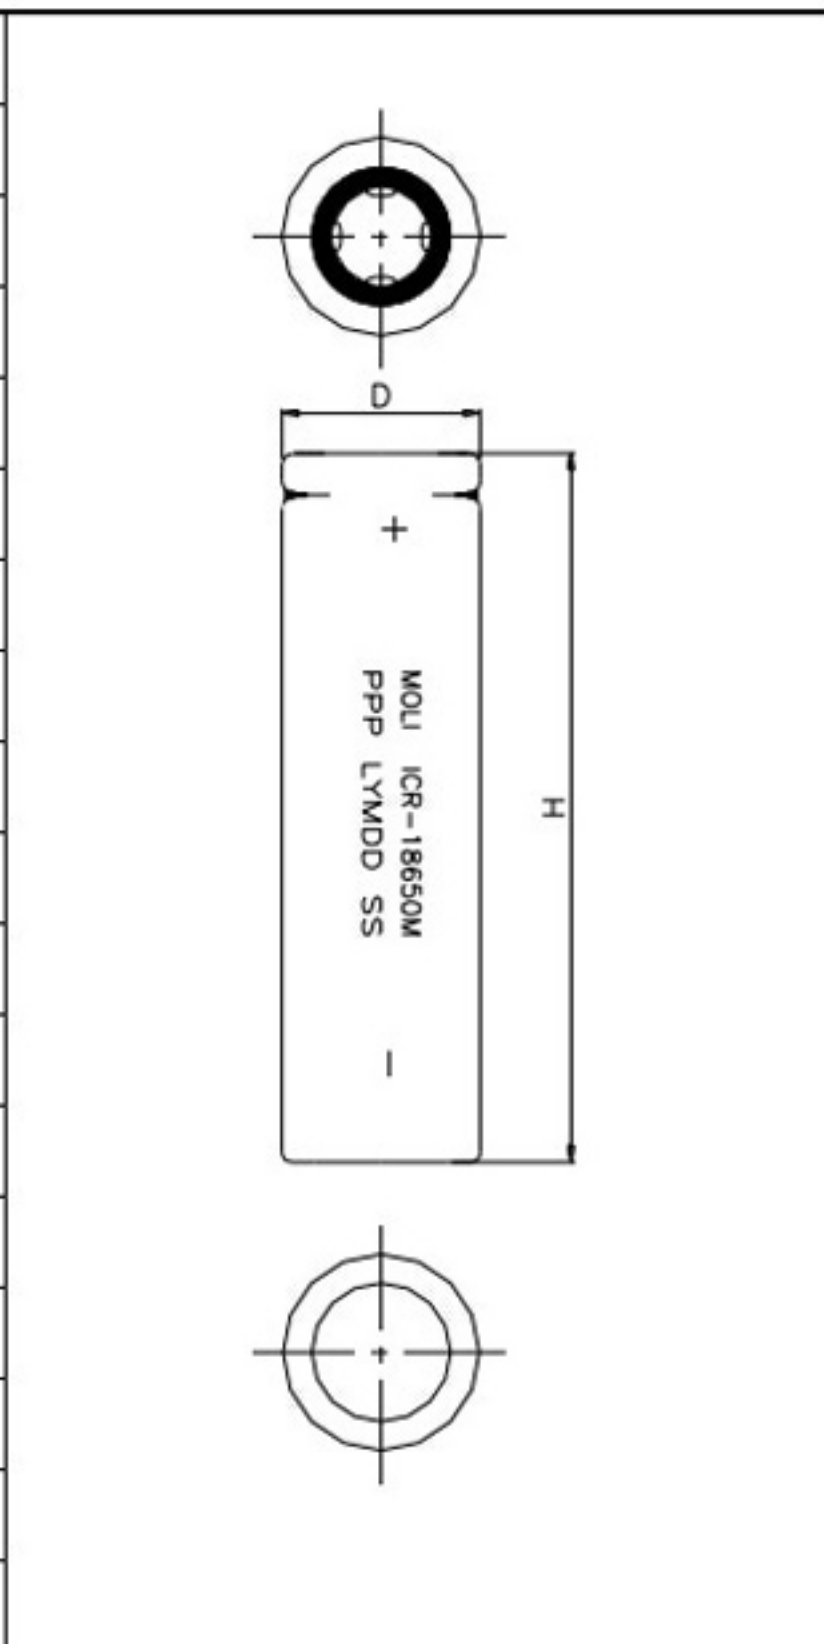


■ **Charge Characteristics**

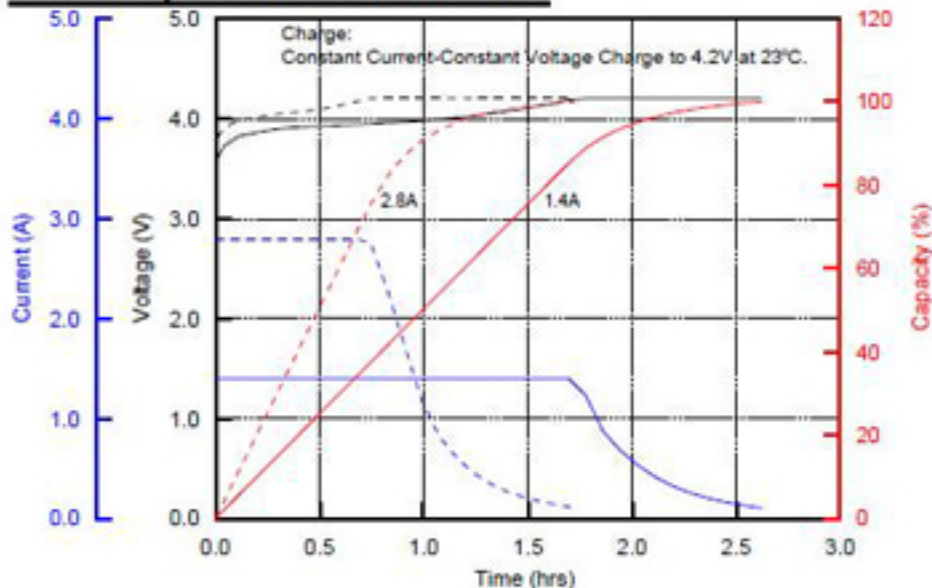

■ **Discharge Rate Characteristics**

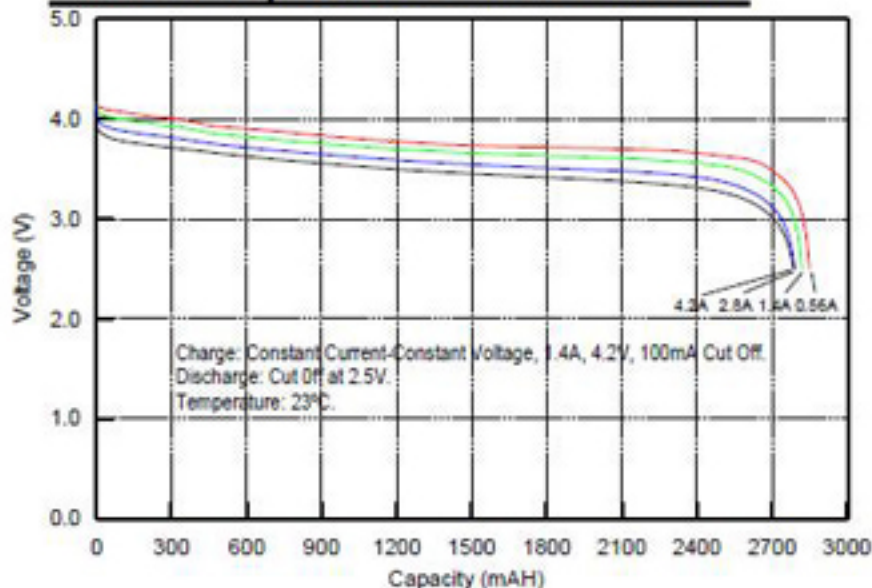

■ **Discharge Temperature Characteristics**

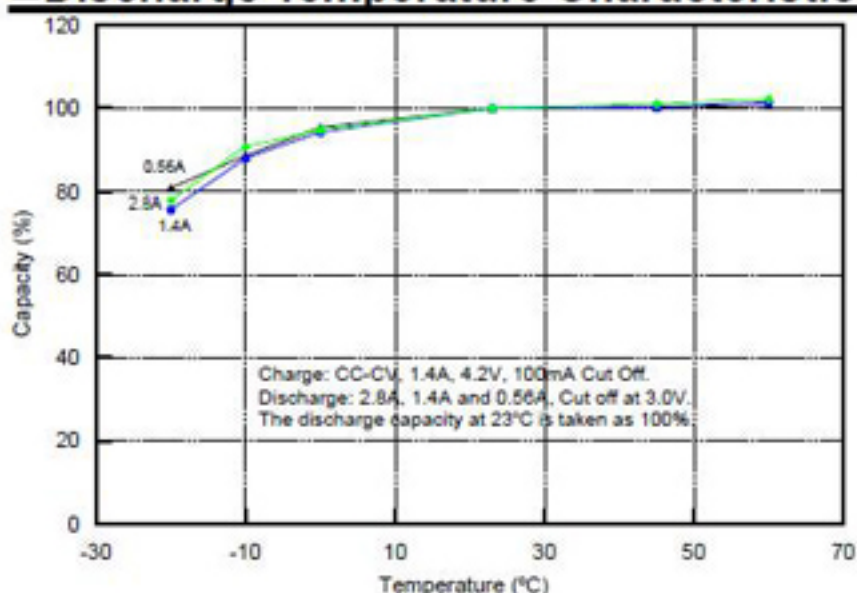

■ **Cycle Characteristics**

