


ETD&EER Coers 長條圓柱E形磁芯

Mn-Zn Products



TP40 ETD 29
 ↓ ↓
 Material Type 適用材質
 Dimension 尺寸

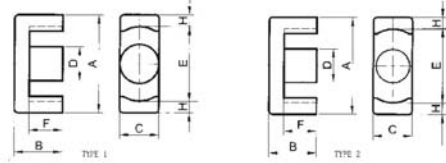

Ordering code	Dimensions									Effective Parameter				Electrical characteristics							Wt(g) (SET)	
	A	B	C	D	E	F	H	I		C1	Ae	le	Ve	TP40	T2	T3	T5	T6	T7	T10		
	UNIT:mm									mm ²	mm ²	mm	mm ³	±25%	±25%	±25%	±25%	±25%	±25%	±25%	+40%	-30%
ETD29	29.8 ±0.8	15.8 ±0.2	9.5 ±0.3	9.5 ±0.3	22.7 ±0.7	11.0 ±0.30	4.0 ±0.25							2400							30	
ETD34	34.2 ±0.8	17.3 ±0.2	10.8 ±0.3	10.8 ±0.3	26.3 ±0.7	12.10 ±0.3	4.3 ±0.25							2850							40	
ETD39	3.91 ±0.9	19.8 ±0.2	12.5 ±0.3	12.5 ±0.3	30.1 ±0.8	14.6 ±0.4	4.85 ±0.3							3200							70.5	
ETD44	44.0 ±1.0	22.3 ±0.2	14.8 ±0.4	14.8 ±0.4	33.3 ±0.8	16.5 ±0.4	15.6 ±0.3							4000							105	
ETD49	48.7 ±1.1	24.7 ±0.2	16.3 ±0.4	16.3 ±0.4	37.0 ±0.9	18.1 ±0.4	5.90 ±0.3							4550							120	
EER28X14	28.55 ±0.55	14.0 ±0.2	11.4 ±0.25	9.9 ±0.25	21.2min	9.65 ±0.25	=3.4							2870							28	
EER28X17	28.55 ±0.55	16.9 ±0.25	11.4 ±0.25	9.9 ±0.25	21.2min	12.59 ±0.3	=3.4							2575							35	



鐵研科技股份有限公司
 湯姆遜科技股份有限公司

企業總部(臺灣)
 (T):+886-3-2624980
 (F):+886-3-2624950
 E-mail:taiwan@takferrite.com
 www.takferrite.com

鐵研(東莞廠)
 (T):+86-769-86310390 (F):+86-769-86310396
 E-mail:sales-operation@takferritedg.com
 湯姆遜(連平廠)
 TEL:+86-762-4329903 FAX:+86-762-4329002