




TP40 PC 14 × 8
 ↓ Material Type 適用材質
 ↓ Outside Diameter(A) 外徑
 ↓ Height(±B) 高度



Ordering code	Dimensions								Effective Parameter				Electrical characteristics					Wt(g) (SET)			
	A	B	C	D	E	F	G	H	C1	Ae	le	Ve	TP40	T2	T3	T5	T6		T7	T10	
	UNIT:mm								mm ²	mm ²	mm	mm ²	±25%	±25%	±25%	±25%	±25%	±25%	±25%	+40%	-30%
PC14X8	14.05 ±0.25	4.15 ±0.2	9.4 ±0.2	2.9 ±0.2	11.8 ±0.2	5.9 ±0.15	8.6MIN	3.1 ±0.1					1800							3.0	
PC18X11	18.0 ±0.4	5.3 ±0.2	11.94 ±0.3	3.7 ±0.2	15.15 ±0.15	7.4 ±0.2	10.5MIN	3.1 ±0.1					2800							6.2	
PC23X11	22.9 ±0.45	5.5 ±0.15	15.2 ±0.25	3.75 ±0.15	18.25 ±0.3	9.7 ±0.25	13.2MIN	5.1 ±0.15					4500							10.8	
PC23X18	22.9 ±0.45	9.0 ±0.4	15.2 ±0.25	7.2 ±0.4	18.25 ±0.3	9.7 ±0.25	13.2MIN	5.1 ±0.15					2750							14.5	

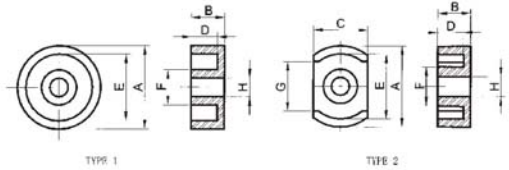

鐵研科技股份有限公司
 湯姆遜科技股份有限公司

企業總部(臺灣)
 (T):+886-3-2624980
 (F):+886-3-2624950
 E-mail:taiwan@takferrite.com
 www.takferrite.com

鐵研(東莞廠)
 (T):+86-769-86310390 (F):+86-769-86310396
 E-mail:sales-operation@takferritedg.com
 湯姆遜(連平廠)
 TEL:+86-762-4329903 FAX:+86-762-4329002