

L22A 高磁导EMI材料
HIGH PERM. & EMI MATERIALS

L22A 为镍锌铁氧体材料，初始磁导率 (μ_i) 约 2200，饱和磁通密度 (Bs) 约 270 mT (25 °C) / 180 mT (80 °C)，居里温度高于 90 °C。高 μ_i 使其在百 kHz 级的低频段即具高阻抗，矫顽力仅约 9 A/m，磁滞损很低，市电输入端与大型共模电感可在低频取得有效衰减；损耗因子 20×10^{-6} (0.1 MHz) / 35×10^{-6} (0.3 MHz)。典型应用为低频 EMI 抑制、电源输入端滤波器与大型共模电感。本材料居里温度高于 90 °C，属 L 系温度上限较低的一端，适用于室温至中温环境；工作温度较高或需要更宽频带时往 L8A、L6A、L43 方向优先选择。与 L28A (μ_i 约 2800) 为相邻档位，两者标称 μ_i 差在 $\pm 25\%$ 公差带内互有重叠，依低频阻抗需求与温度裕度择一即可。

L22A is a NiZn ferrite with an initial permeability (μ_i) of approx. 2200, a saturation flux density (Bs) of approx. 270 mT at 25 °C (180 mT at 80 °C) and a Curie temperature above 90 °C. The high μ_i provides high impedance already in the hundreds-of-kHz range, and the coercivity of only about 9 A/m keeps hysteresis loss very low, giving mains-input filters and large common-mode inductors effective low-frequency attenuation; the loss factor is 20×10^{-6} at 0.1 MHz / 35×10^{-6} at 0.3 MHz. Typical uses are low-frequency EMI suppression, mains-input filters and large common-mode inductors. With its Curie temperature above 90 °C it belongs to the cooler end of the L family — suited to room-to-moderate temperatures; prefer L8A, L6A or L43 when the operating temperature or bandwidth demands more. L28A (μ_i approx. 2800) is the adjacent step — the nominal difference lies within the $\pm 25\%$ tolerance overlap, so choose by low-frequency impedance need and temperature margin.

- Mains-Input EMI Filter
- Large Common-Mode Inductor
- Low-Frequency Suppression Ring

电磁特性 MAGNETIC CHARACTERISTICS


特性 Characteristic	条件 Condition	值 Value	单位 Unit
初始磁导率 μ_i Initial Permeability	100 kHz & <0.2 mT	2200 $\pm$ 25%	
饱和磁通密度 Bs Saturation Flux Density	3000 A/m · 25 °C 100 Hz	270	mT
饱和磁通密度 Bs Saturation Flux Density	3000 A/m · 80 °C 100 Hz	180	mT
残留磁通密度 Br Remanence	3000 A/m · 25 °C 100 Hz	110	mT
残留磁通密度 Br Remanence	3000 A/m · 80 °C 100 Hz	52	mT
矫顽力 Hc Coercivity	3000 A/m · 25 °C 100 Hz	9	A/m
矫顽力 Hc Coercivity	3000 A/m · 80 °C 100 Hz	8	A/m
$\alpha\mu_r$ (温度系数) Temperature coefficient of permeability	20 ~ 60 °C	8	$\times 10^{-6}/K$
相对损耗因子 $\tan\delta/\mu_i$ Relative Loss Factor	0.1 MHz & <0.2 mT	20	$\times 10^{-6}$
相对损耗因子 $\tan\delta/\mu_i$ Relative Loss Factor	0.3 MHz & <0.2 mT	35	$\times 10^{-6}$
居里温度 Tc Curie Temp.	100 kHz & <0.2 mT	>90	°C
密度 D Density	阿基米德法 Archimedes method	5.0	g/cm ³
电阻率 ρ Volume Resistivity	直流电流 DC Current	10 ⁷	$\Omega \cdot m$

备注：各项数值均为环形磁芯T31×19×8测得的典型数值，由于几何形状和尺寸的影响，产品规格将与这些数据有所差异。
Note: all values are typical data measured on a T31×19×8 toroidal core; actual product specifications will vary with geometry and size.


特性曲线详见次页 CHARACTERISTIC CURVES — SEE NEXT PAGE

L22A


特性曲线 CHARACTERISTIC CURVES

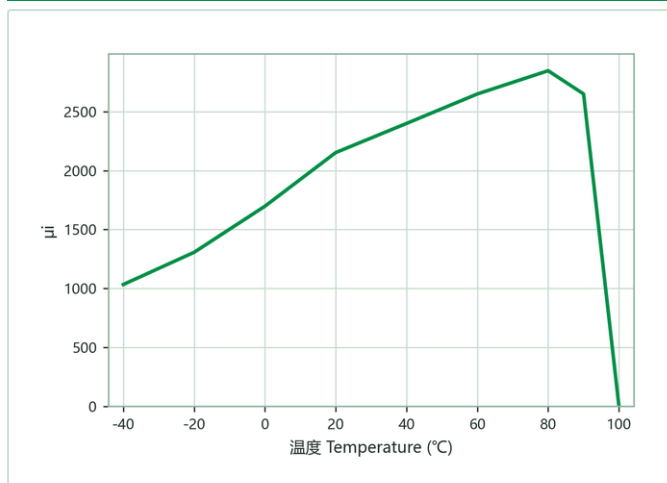


初始磁导率—温度特性
Initial Permeability vs. Temperature

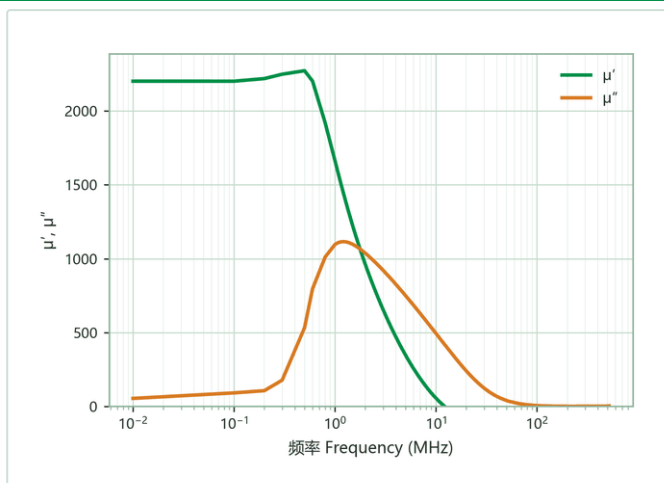


复数磁导率—频率特性
Complex Permeability (μ' , μ'') vs. Frequency

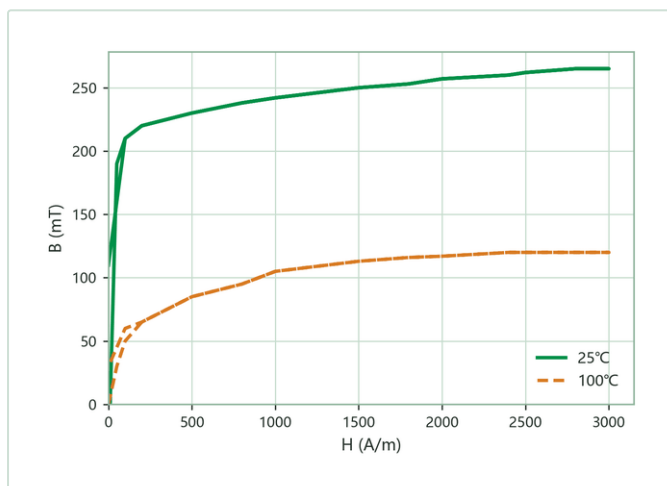

静态磁化曲线
Static Magnetization Curves (B-H)

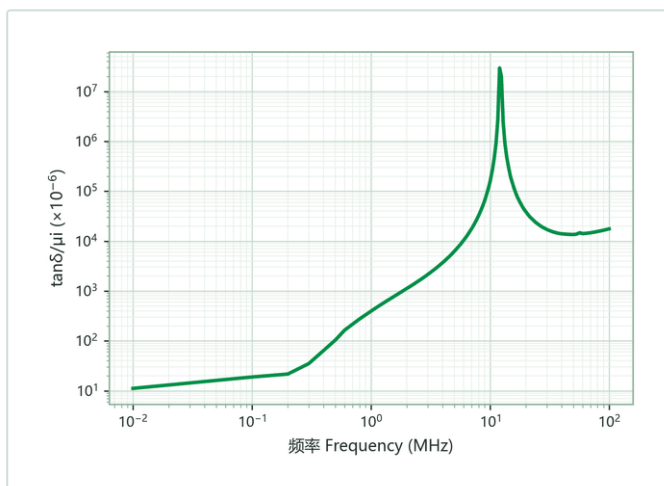

相对损耗因子—频率特性
Relative Loss Factor ($\tan\delta/\mu_i$) vs. Frequency

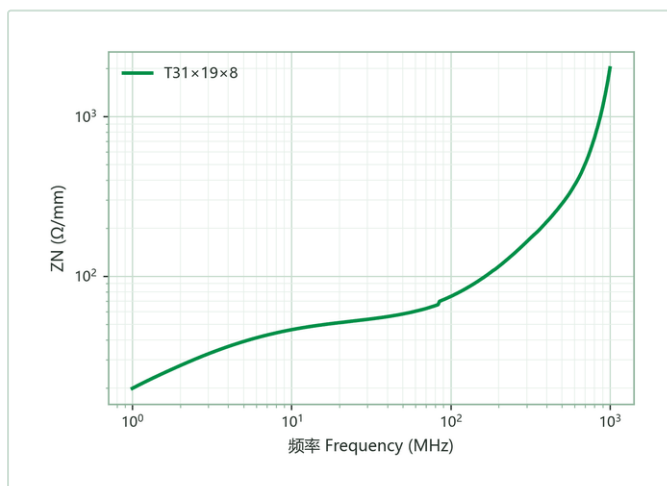

标准化阻抗—频率特性 ($\Phi 0.5$ mm 漆包线 100 mm · 单圈测量)
Normalized Impedance ZN vs. Frequency (single turn of $\Phi 0.5$ mm wire, 100 mm long)